

552,416

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/089776 A1

(51) International Patent Classification⁷: **B65D 49/04,**
47/24

(81) Designated States (*national*): AL, AM, AT, AZ, BA, BG, BY, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HR, HU, IL, IS, JP, KG, KP, KR, KZ, LT, LV, MD, MK, NO, PL, PT, RO, SE, SK, TJ, TM, TR, UA, UZ, YU.

(21) International Application Number:
PCT/RU2003/000143

(22) International Filing Date: 8 April 2003 (08.04.2003)

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(25) Filing Language: English

Published:

(26) Publication Language: English

— with international search report


(71) Applicant and

(72) Inventor: PLOKHUTA, Oleg Ivanovich [RU/RU]; ul. Lodochnaya, 33-2-146, Moscow, 123364 (RU).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(74) Agent: YAKOVLEV, Vsevolod Georgievich; OOO TD "ALTERNATIVA - ANA", Selivestrov per., 2, Moscow, 107045 (RU).

(54) Title: CLOSURE

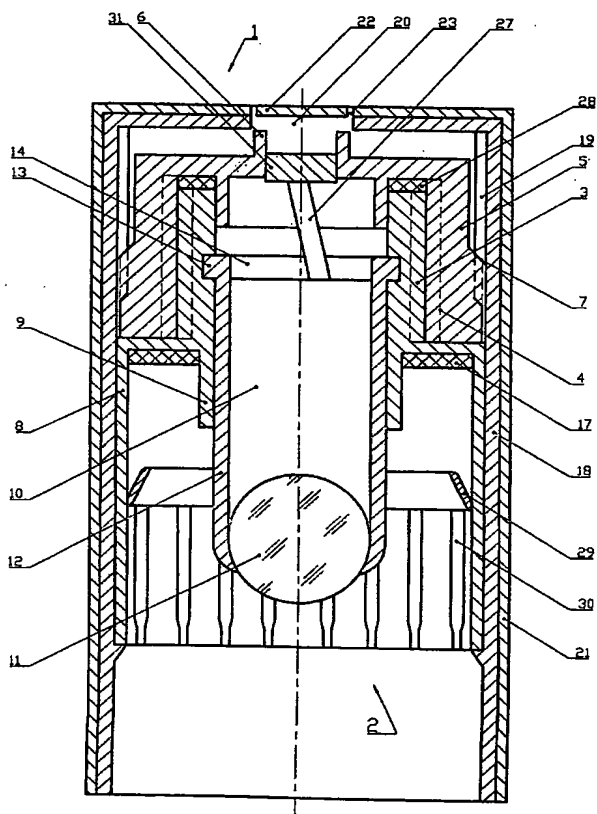

(57) Abstract: The closure (1) includes a discharge sleeve (3) with coaxial outer pipe (8) and inner pipe (9) on its inlet end, an inner hood (5) having a pouring tube (6) on its end and splines (7) on its side surface, installed on the discharge sleeve (3) by means of a thread (4) to allow its axial movement during rotation, the outer hood (18) with splines (19) on its interior surface to interact with splines of the inner hood, and a decorative casing (21) with a tear member (22) on its end. A check valve (10) with a fixing means (13, 15) on its exterior end surface to interact with a fixing means (14, 16) positioned symmetrically on the interior surface of the discharge sleeve. A decorative casing is installed on the outer hood in such a way that the decorative casing and the outer hood can not rotate around each other, and the decorative casing and the outer pipe can rotate around each other.

WO 2004/089776 A1